


Combiflex Metal Threaded Sockets

with outer thread acc.to DIN ISO 228 - cast-on

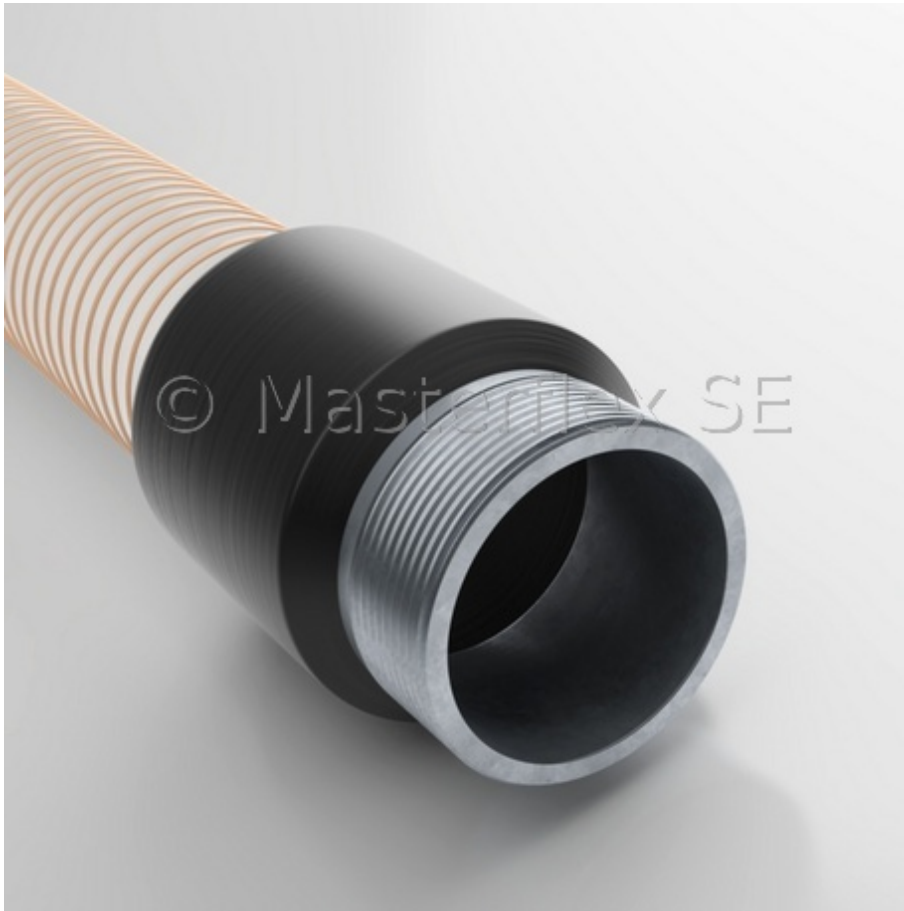

Material

- colour: black
- metal threaded sockets: aluminium
- PU-sprue: abrasion resistant polyurethane

Applications

- for application for connectors to machines and piping
- for mounting of valves for solid, liquid and gaseous media
- Cast-on metal screw connectors with external thread acc. to DIN ISO 228 for all Master-PUR hoses

Properties

- good flow characteristics
- rust-free
- watertight
- odourless/tasteless
- dissipation of electrostatic charges via grounding connection between hose and valve/fitting
- good chemical resistance
- high tensile strength

Temperature Range

- -40°C to +90°C
- peaks to +125°C

Product Variations

DN	connector thread size	outer Ø gate	weight/piece incl. gate	article no. threaded socket	article no. gate
	inch	mm	kg		
25	1	42	0,09	004589	005371
32	1 1/4	52	0,16	004599	005373
38	1 1/2	60	0,21	004600	008437
40	1 1/2	60	0,21	007703	006628
50	2	71	0,29	002488	005395
65	2 1/2	90	0,46	004602	005511
75	3	106	0,78	004603	005416
80	3 1/2	106	0,60	004604	007627
100	4	130	1,12	004624	005443
125	5	155	1,39	/	005448
150	6	184	1,74	004632	005555

All data refers to a medium and ambient temperature of +20 °C.

* Refers to the inner hose lining

Subject to technical changes and colour deviations.

Manufacturing and Delivery

- Made-to-order production in the above nominal sizes

Available on request

- Available on request in other sizes and materials.