


## Master-PVC HF


### PVC Film/Foil Hose, medium-weight, flexible



#### Technical Drawing

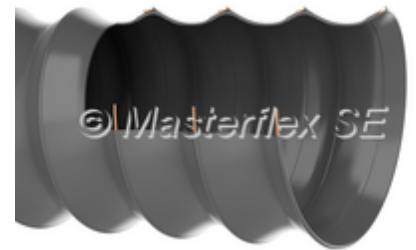

#### Connections

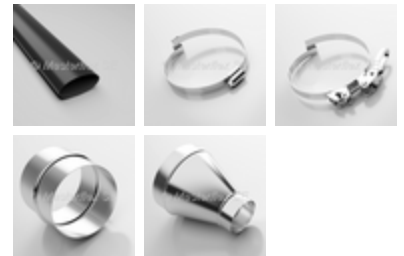

#### Construction



#### Material

- spiral: spring steel wire, plastic-coated
- wall: soft PVC
- Film thickness between spirals approx. 1.2 - 1.5mm, dep. on DN size

#### Applications

- Protective hose
- Liquid drainage
- Suction and transport hose for solid, liquid and gaseous media
- Ventilation and air-conditioning systems
- Dust removal
- Apparatus construction
- Spinning fibre extraction
- Transport of fine-grained particles, such as dust and powder

#### Properties

- good flexibility
-



170	0,35	0,16	255	181	2,22	663-170-102	000454:170:x	5/10/15/20/25
175	0,35	0,16	260	186	2,26	663-175-102	000454:175:x	5/10/15/20/25
180	0,35	0,15	270	191	2,35	663-180-102	000454:180:x	5/10/15/20/25
200	0,3	0,15	300	211	2,62	663-200-102	000454:200:x	5/10/15/20/25
203	0,29	0,14	305	214	2,73	663-203-102	000454:203:x	5/10/15/20/25
215	0,25	0,12	323	227	3,16	663-215-102	000454:215:x	5/10/15/20/25
225	0,2	0,12	338	237	3,3	663-225-102	000454:225:x	5/10/15/20/25
250	0,2	0,12	375	262	3,67	663-250-102	000454:250:x	5/10/15/20/25
300	0,15	0,1	450	312	4,41	663-300-102	000454:300:x	5/10/15
315	0,15	0,1	473	327	4,63	663-315-102	000454:315:x	5/10/15
325	0,1	0,09	488	337	4,77	663-325-102	000454:325:x	5/10/15
350	0,1	0,09	525	362	5,14	663-350-102	000454:350:x	5/10/15
400	0,1	0,08	600	412	5,87	663-400-102	000454:400:x	5/10/15
500	0,05	0,03	750	512	7,34	663-500-102	000454:500:x	5/10/15

All data refers to a medium and ambient temperature of +20 °C.

\* Refers to the inner hose lining

Subject to technical changes and colour deviations.

#### Order-specific production

- Order-specific production in the above listed sizes and lengths, in grey or transparent. Delivery approx. 10 working days.

#### Available on request

- Available on request in other lengths, sizes.