

Master-Clip VINYL EL


Suction & Blower hose made from PVC coated polyester fabric, electroconductive, surface resistance <math> < 10^6 </math> Ohm



Technical Drawing



Connections

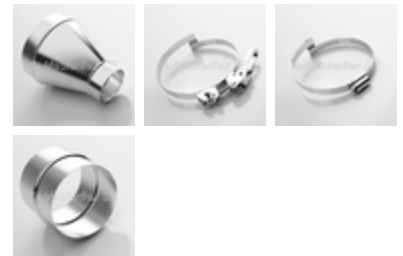

Construction



Material

- clip profile spiral: hot-dip galvanised steel band
- wall: PVC-coated polyester fabric, electrically conductive $< 10^6 </math> Ohm$

Applications

- Danger zones, which requires electro-conductivity acc. to TRGS
- Suction and conveyance of aggressive media, explosive gases and fumes
- Air supply and extraction in explosion-protected areas
- for greater mechanical demands
- Low pressure range
- Extractor units

Properties

- outer chafing protection spiral
- surface resistance <math> < 10^6 </math> Ohm
- approved acc. to TRGS 727 and ATEX 2014/34 EU. [Details acc. to certificate](#)
- vibration-proof

550	0,042	0,01	440	10,49	260-550-207	000367:550:x	3-10	20
600	0,039	0,01	480	11,43	260-600-207	000367:600:x	3-10	15
700	0,031	0,01	560	10,84	260-700-207	000367:700:x	3-10	15
800	0,022	0,01	640	15,2	260-800-207	000367:800:x	3-10	15
900	0,016	0,01	720	17,1	260-900-207	000367:900:x	3-10	15

All data refers to a medium and ambient temperature of +20 °C.

* Refers to the inner hose lining

Subject to technical changes and colour deviations.

Available on request

- Available on request in other lengths, sizes, colours, spiral intervals, with stainless steel spirals.

Order-specific production

- Order-specific production in above listed sizes and lengths of 3 to 10m