

Master-Clip PE


Suction & Blower Hose made from PE-coated PE fabric, environmentally friendly



Technical Drawing



Connections

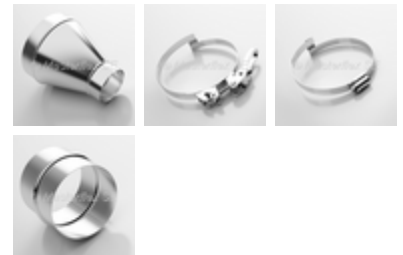

Construction



Material

- clip profile spiral: hot-dip galvanised steel band
- wall: double-sided PE-coated PE fabric

Applications

- Air-conditioning and ventilation systems
- Air supply and extraction
- Vacuum devices for asbestos removal
- Low pressure range
- Extractor units

Properties

- outer chafing protection spiral
- high tension-proof connection of wall-lining and spiral via special clamp mechanism
- high temperature resistance as PVC hose
- highly flexible
- increased vacuum resistance

- extremely compressable to approx. 1:6
- smallest bending radii
- halogen free
- more environmentally friendly alternative to PVC hoses
- extremely lightweight

Temperature Range

- -40°C to +85°C
- peaks to +95°C

Product Variations (**Please replace “x” with your desired hose length.)

DN	op. pressure	vacuum	bend radius	weight/m	old article no.	**new article no.	production length	max. production length
	bar	bar	mm	kg			m	m
40	0,93	0,46	24	0,4	213-040-103	000254:40:x	3-10	25
45	0,92	0,43	27	0,4	213-045-103	000254:45:x	3-10	25
50	0,9	0,39	30	0,4	213-050-103	000254:50:x	3-10	25
55	0,85	0,32	33	0,4	213-055-103	000254:55:x	3-10	25
60	0,78	0,27	36	0,5	213-060-103	000254:60:x	3-10	25
65	0,68	0,23	39	0,5	213-065-103	000254:65:x	3-10	25
70	0,67	0,2	42	0,5	213-070-103	000254:70:x	3-10	25
75	0,62	0,18	45	0,5	213-075-103	000254:75:x	3-10	25
80	0,61	0,15	48	0,6	213-080-103	000254:80:x	3-10	25
90	0,56	0,12	54	0,6	213-090-103	000254:90:x	3-10	25
100	0,51	0,1	60	0,6	213-100-103	000254:100:x	3-10	25
110	0,48	0,08	66	0,6	213-110-103	000254:110:x	3-10	25
120	0,36	0,07	72	0,6	213-120-103	000254:120:x	3-10	25
125	0,33	0,06	75	0,7	213-125-103	000254:125:x	3-10	25
130	0,28	0,06	78	0,7	213-130-103	000254:130:x	3-10	25
140	0,25	0,05	84	0,7	213-140-103	000254:140:x	3-10	25
150	0,22	0,04	90	0,8	213-150-103	000254:150:x	3-10	25
160	0,21	0,04	96	0,8	213-160-103	000254:160:x	3-10	25
170	0,19	0,03	102	0,8	213-170-103	000254:170:x	3-10	25
175	0,185	0,03	105	0,9	213-175-103	000254:175:x	3-10	25
180	0,172	0,03	108	0,9	213-180-103	000254:180:x	3-10	25
200	0,148	0,03	120	1	213-200-103	000254:200:x	3-10	25
215	0,128	0,02	151	1,1	213-215-103	000254:215:x	3-10	25
225	0,115	0,02	158	1,1	213-225-103	000254:225:x	3-10	25
250	0,1	0,02	175	1,3	213-250-103	000254:250:x	3-10	25
275	0,08	0,01	193	1,4	213-275-103	000254:275:x	3-10	25
300	0,07	0,01	210	1,5	213-300-103	000254:300:x	3-10	25
315	0,062	0,01	221	1,6	213-315-103	000254:315:x	3-10	25
325	0,059	0,01	228	1,7	213-325-103	000254:325:x	3-10	25
350	0,056	0,01	245	1,9	213-350-103	000254:350:x	3-10	25
375	0,05	0,01	263	2,2	213-375-103	000254:375:x	3-10	25
400	0,047	0,01	280	2,4	213-400-103	000254:400:x	3-10	25
450	0,045	0,01	360	2,7	213-450-103	000254:450:x	3-10	25
500	0,043	0,01	400	3,1	213-500-103	000254:500:x	3-10	25
550	0,042	0,01	440	3,5	213-550-103	000254:550:x	3-10	25

600	0,039	0,01	480	3,9	213-600-103	000254:600:x	3-10	25
700	0,031	0,01	560	4,5	213-700-103	000254:700:x	3-10	25
800	0,022	0,01	640	5,2	213-800-103	000254:800:x	3-10	25
900	0,016	0,01	720	6	213-900-103	000254:900:x	3-10	25

All data refers to a medium and ambient temperature of +20 °C.

* Refers to the inner hose lining

Subject to technical changes and colour deviations.

Order-specific production

- Order-specific production in above listed sizes and lengths of 3 to 10m

Available on request

- Available on request in other lengths, sizes, colours, spiral intervals, with stainless steel spirals.