

Master-Clip SPARK XL


Special hose for welding fume extraction with increased risk of flying sparks



Technical Drawing



Connections

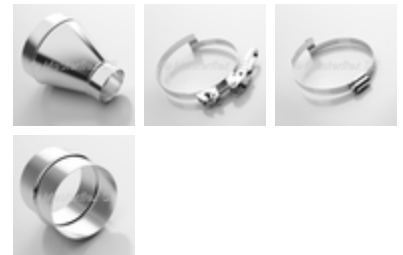

Construction



Material

- clip profile spiral: hot-dip galvanised steel band
- wall: special-coated textile high-temperature fabric

Applications

- for greater safety requirements
- Grinding dust extraction with high degree of flying sparks
- Welding fume extraction with greater degree of flying sparks
- Suction of hot and abrasive sanding dust

Properties

- hardly inflammable
- outer chafing protection spiral
- primarily resistant to increased risk of flying sparks
- good mechanical resistance
- high tension-proof connection of wall-lining and spiral via special clamp mechanism
- highly flexible

800	0,022	0,01	640	8,72	232-800-107	000329:800:x	3-10	15
900	0,016	0,01	720	9,67	232-900-107	000329:900:x	3-10	15

All data refers to a medium and ambient temperature of +20 °C.
* Refers to the inner hose lining
Subject to technical changes and colour deviations.

Order-specific production

- Order-specific production in above listed sizes and lengths of 3 to 10m

Available on request

- Available on request in other lengths, sizes, colours, spiral intervals, with stainless steel spirals.